

GB2427606

Publication Title:

Portable storage container

Abstract:

Abstract of GB2427606

A portable storage container (10) that both stacks and nests with similar containers includes a plurality of walls extending upwardly from a floor. At least one of the walls includes an inner wall (22) portion and an outer wall (20) portion. At least one of the inner and outer wall portions has an elongated pin opening (30). A pair of bail members (18) are each movable among a nest position, an upper stack position, a middle stack position and a lower stack position. Each bail member includes a support portion (19) and arm (38) extending transversely from outer ends of the support portion. A pin (32) extends transversely from an outer end of each arm. Each pin (32) is received in one of the pin openings (30), with the arm (38) received between the inner and outer wall portions. Data supplied from the esp@cenet database - Worldwide

Courtesy of <http://v3.espacenet.com>

(21) Application No: 0620076.0


(22) Date of Filing: 12.04.2005

(30) Priority Data:
(31) 10823243 (32) 12.04.2004 (33) US(86) International Application Data:
PCT/US2005/012473 En 12.04.2005(87) International Publication Data:
WO2005/100179 En 27.10.2005(71) Applicant(s):
Rehrig Pacific Company
(Incorporated in USA - California)
4010 E 26th Street, Los Angeles, CA 90023,
United States of America(72) Inventor(s):
Jon P Hassell
William P Apps
Matthew L Dannenfeldt

(continued on next page)

(51) INT CL:
B65D 21/06 (2006.01) B65D 21/032 (2006.01)(52) UK CL (Edition X):
B8P PK5 PU(56) Documents Cited by ISA:
EP 0697341 A1 EP 0557002 A1
US 20030230510 A1(58) Field of Search by ISA:
INT CL B65D
Other:(54) Abstract Title: **Portable storage container**

(57) A portable storage container (10) that both stacks and nests with similar containers includes a plurality of walls extending upwardly from a floor. At least one of the walls includes an inner wall (22) portion and an outer wall (20) portion. At least one of the inner and outer wall portions has an elongated pin opening (30). A pair of bail members (18) are each movable among a nest position, an upper stack position, a middle stack position and a lower stack position. Each bail member includes a support portion (19) and arm (38) extending transversely from outer ends of the support portion. A pin (32) extends transversely from an outer end of each arm. Each pin (32) is received in one of the pin openings (30), with the arm (38) received between the inner and outer wall portions.

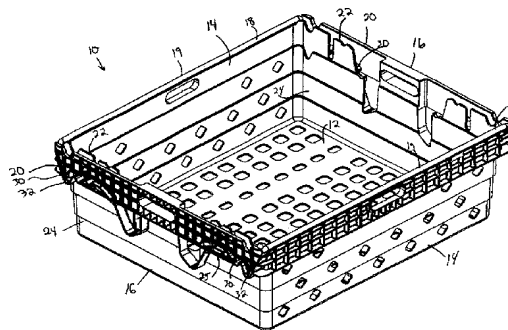

GB 2427606 A continuation

(74) Agent and/or Address for Service:
Urquhart-Dykes & Lord LLP
New Priestgate House, 57 Priestgate,
PETERBOROUGH, PE1 1JX,
United Kingdom